


Heat Shrink Straight Through Joint

for 1 core / 3 core XLPE Cable from 11 kV - 36 kV Voltage

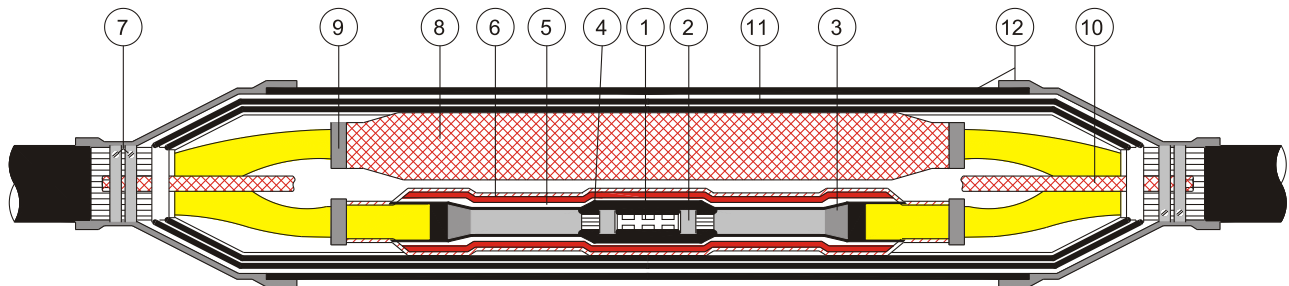

- | | | | |
|-----------------------|---|----|-----------------------------|
| In Line Connector | 1 | 7 | Worm Drive Clamp |
| Stress Control Mastic | 2 | 8 | Copper Woven Mesh Tape |
| Stress Control Tape | 3 | 9 | Constant Force Spring Clamp |
| Stress Control Sleeve | 4 | 10 | Armor Continuity Connection |
| Insulation Sleeve | 5 | 11 | Metallic Protection Cage |
| Dual Wall Sleeve | 6 | 12 | Outer Protection Sleeve |

Heat shrink medium voltage straight through joint for three core, EPR or XLPE insulated, wire and tape screened, armoured or unarmoured cable, copper or aluminium conductors. Cable inline connectors not included

Part No.	Max. Volt kV	Cable Size sq.mm.
AXSJ-11	12/17.5	16-35
AXSJ-12	12/17.5	50-95
AXSJ-13	12/17.5	120-185
AXSJ-14	12/17.5	240-400
AXSJ-15	12/17.5	500-630
AXSJ-21	24	25-50
AXSJ-22	24	70-95
AXSJ-23	24	120-150
AXSJ-24	24	185-240
ASXJ-25	24	300-400
AXSJ-31	36	35-70
AXSJ-32	36	95-150
AXSJ-33	36	185-300
AXSJ-34	36	400-630

Heat shrink medium voltage straight through joint for single core, EPR or XLPE insulated, wire and tape screened, armoured or unarmoured cable, copper or aluminium conductors. Cable inline connectors not included

Part No.	Max. Volt kV	Cable Size sq.mm.
AXSSJ-11	12/17.5	25-50
AXSSJ-12	12/17.5	70-120
AXSSJ-13	12/17.5	150-185
AXSSJ-14	12/17.5	240-300
AXSSJ-15	12/17.5	400-500
AXSSJ-16	12/17.5	630-1000
AXSSJ-21	24	25-50
AXSSJ-22	24	70-150
AXSSJ-23	24	185-240
AXSSJ-24	24	300-400
AXSSJ-25	24	500-630
AXSSJ-31	36	35-70
AXSSJ-32	36	95-150
AXSSJ-33	36	185-400
AXSSJ-34	36	500-1000

Note : for Transition Joints, Branch Joints or any other types of Joints please contact our sales office.