


Heat Shrink Termination

for 1 core / 3 core XLPE Cable from 11 kV - 36 kV Voltage

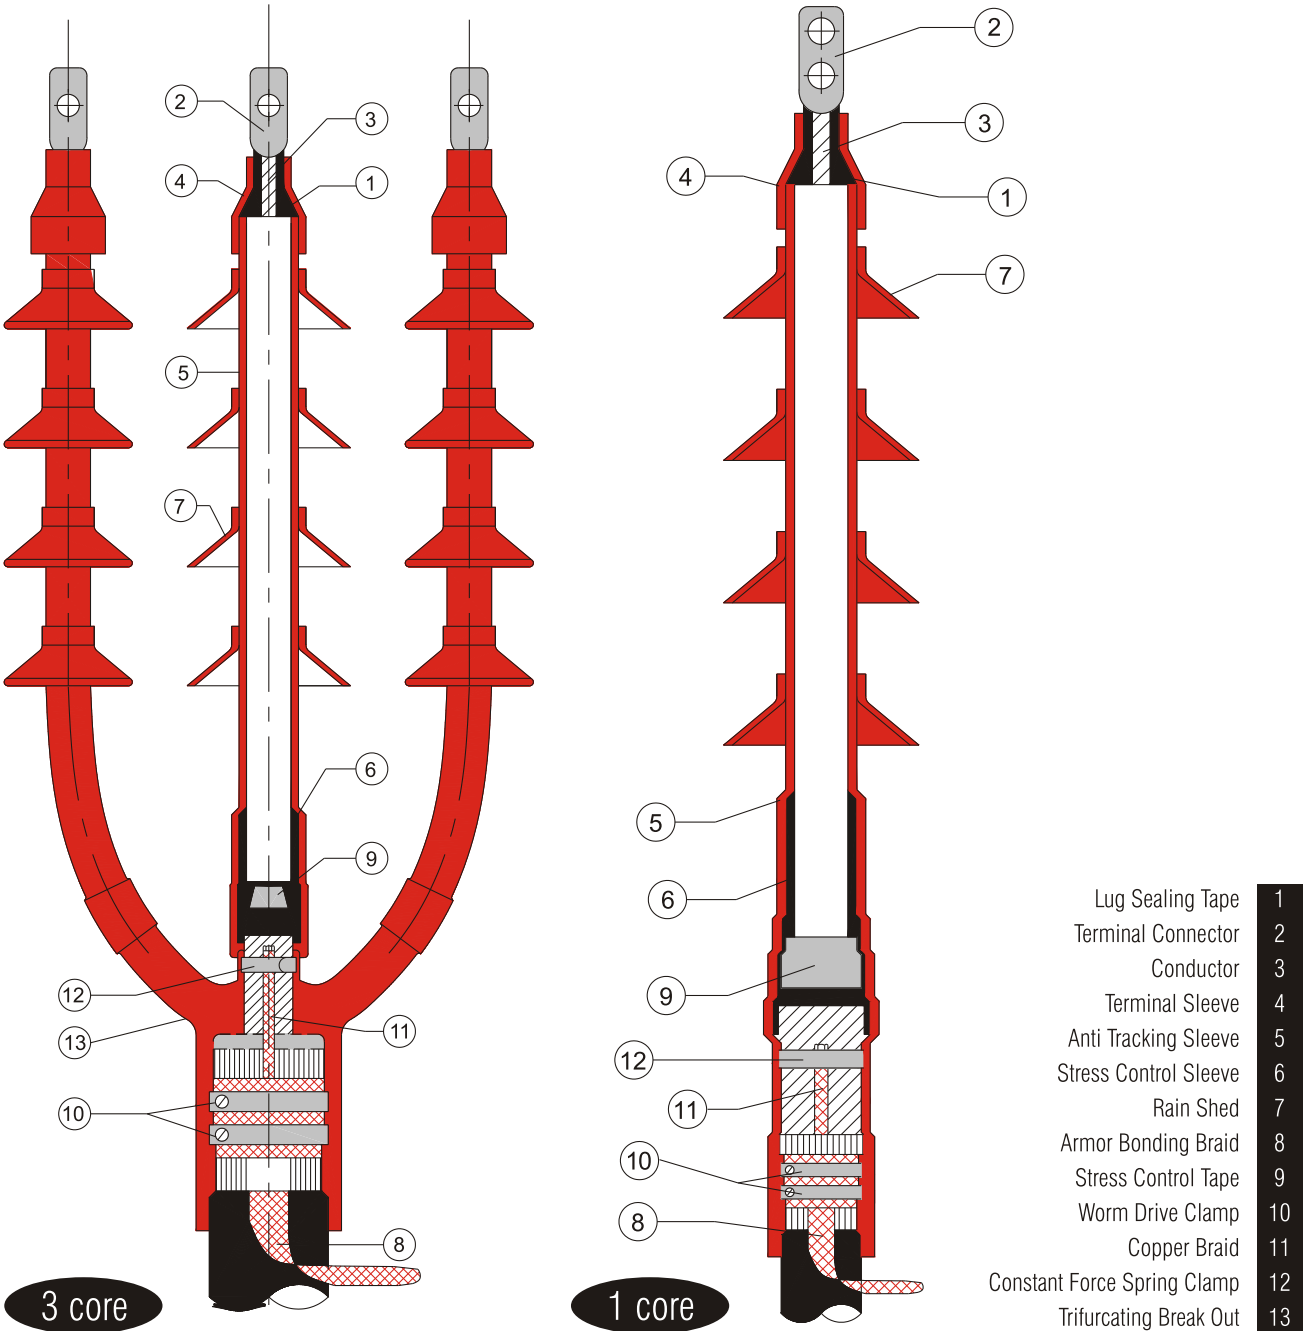

All indoor terminations are supplied without rain sheds

Heat Shrink Termination

for 1 core / 3 core XLPE Cable from 11 kV - 36 kV Voltage

Heat shrink medium voltage indoor termination for three core, EPR or XLPE insulated, wire and tape screened, armoured or unarmoured cable, copper or aluminium conductors. Cable lugs not included

Part No.	Max. Volt kV	Cable Size sq.mm.	Tail Length mm
AXSI-11	12/17.5	16-35	450/650
AXSI-12	12/17.5	50-95	450/650
AXSI-13	12/17.5	120-185	450/650
AXSI-14	12/17.5	240-300	450/650
AXSI-15	12/17.5	400-630	450/650
AXSI-21	24	25-50	650
AXSI-22	24	70-120	650
AXSI-23	24	150-185	650
AXSI-24	24	240-400	650
AXSI-31	36	25-50	850
AXSI-32	36	70-95	850
AXSI-33	36	120-185	850
AXSI-34	36	240-400	850

Heat shrink medium voltage indoor termination for single core, EPR or XLPE insulated, wire and tape screened, armoured or unarmoured cable, copper or aluminium conductors. Cable lugs not included

Part No.	Max. Volt kV	Cable Size sq.mm.	Tail Length mm
AXSSI-11	12/17.5	16-35	300
AXSSI-12	12/17.5	50-95	300
AXSSI-13	12/17.5	120-240	300
AXSSI-14	12/17.5	300-500	300
AXSSI-15	12/17.5	630-1000	300
AXSSI-21	24	25-50	350
AXSSI-22	24	70-150	350
AXSSI-23	24	185-300	350
AXSSI-24	24	400-630	350
AXSSI-31	36	25-50	450
AXSSI-32	36	70-185	450
AXSSI-33	36	240-500	450
AXSSI-34	36	630-1000	450

Heat shrink medium voltage outdoor termination for three core, EPR or XLPE insulated, wire and tape screened, armoured or unarmoured cable, copper or aluminium conductors. Cable lugs not included

Part No.	Max. Volt kV	Cable Size sq.mm.	Tail Length mm
AXSO-11	12/17.5	16-35	650
AXSO-12	12/17.5	50-95	650
AXSO-13	12/17.5	120-185	650
AXSO-14	12/17.5	240-300	650
AXSO-15	12/17.5	400-630	650
AXSO-21	24	25-50	850
AXSO-22	24	70-120	850
AXSO-23	24	150-185	850
AXSO-24	24	240-400	850
AXSO-31	36	25-50	1000
AXSO-32	36	70-95	1000
AXSO-33	36	120-185	1000
AXSO-34	36	240-400	1000

Heat shrink medium voltage outdoor termination for single core, EPR or XLPE insulated, wire and tape screened, armoured or unarmoured cable, copper or aluminium conductors. Cable lugs not included

Part No.	Max. Volt kV	Cable Size sq.mm.	Tail Length mm
AXSSO-11	12/17.5	16-35	300
AXSSO-12	12/17.5	50-95	300
AXSSO-13	12/17.5	120-240	300
AXSSO-14	12/17.5	300-500	300
AXSSO-15	12/17.5	630-1000	300
AXSSO-21	24	25-50	350
AXSSO-22	24	70-150	350
AXSSO-23	24	185-300	350
AXSSO-24	24	400-630	350
AXSSO-31	36	25-50	450
AXSSO-32	36	70-185	450
AXSSO-33	36	240-500	450
AXSSO-34	36	630-1000	450