


Industrial Brass Cable Gland Type: CW

for Armour Cables



Suitable for indoor and outdoor conditions
For single wire armoured, plastic or rubber sheath cables.
Terminates and secure cable armour and outer seal grips
Sheath of cable ensuring mechanical strength and earth continuity

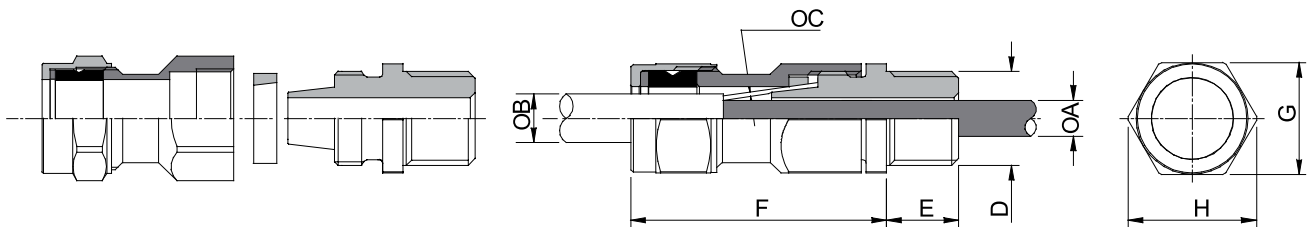

| Cable Dimensions mm | | | Kit Reference | | | Gland Dimensions mm | | | | | |
|---|---------------------|------|-------------------------------------|------|----------------|------------------------|--------------|--------|--|----------------------|------------------------|
| Under Armour Diameter Max A | Overall Diameter | | Armour Wire Diameter C | Size | Part Number | Items Per Pack | Entry Thread | | Approx. Length From Shoulder F | Hexagon Size | |
| | Min | Max | | | | | Size | Length | | Across Flats G | Across Corners H |
| 11.6 | 8.0 | 15.8 | 0.9 | 20S | ACW20S | 2 | M20×1.5 | 10 | 46 | 25.7 | 29.2 |
| 13.9 | 11.7 | 20.8 | 0.9/1.25 | 20 | ACW20 | 2 | M20×1.5 | 10 | 46 | 30.5 | 34.0 |
| 19.9 | 17.0 | 27.2 | 1.25/1.6 | 25 | ACW25 | 2 | M25×1.5 | 10 | 51 | 37.6 | 42.2 |
| 26.2 | 23.5 | 33.5 | 1.6/2.0 | 32 | ACW32 | 1 | M32×1.5 | 10 | 56 | 47.3 | 53.6 |
| 32.1 | 29.0 | 39.9 | 1.6/2.0 | 40 | ACW40 | 1 | M40×1.5 | 15 | 59 | 56.4 | 61.5 |
| 38.1 | 38.0 | 46.2 | 2.0/2.5 | 50S | ACW50S | 1 | M50×1.5 | 15 | 64 | 65.5 | 72.1 |
| 44.0 | 39.5 | 52.6 | 2.0/2.5 | 50 | ACW50 | 1 | M50×1.5 | 15 | 64 | 70.1 | 77.2 |
| 55.9 | 51.3 | 65.3 | 2.5 | 63 | ACW63 | 1 | M63×1.5 | 15 | 67 | 80.0 | 87.4 |
| 67.9 | 62.5 | 78.0 | 2.5 | 75 | ACW75 | 1 | M75×1.5 | 15 | 76 | 98.8 | 109.2 |